




ENCEE CHLOR [®]

ELECTRO-CHLORINATION PLANT

Onsite Generator of Sodium Hypochlorite

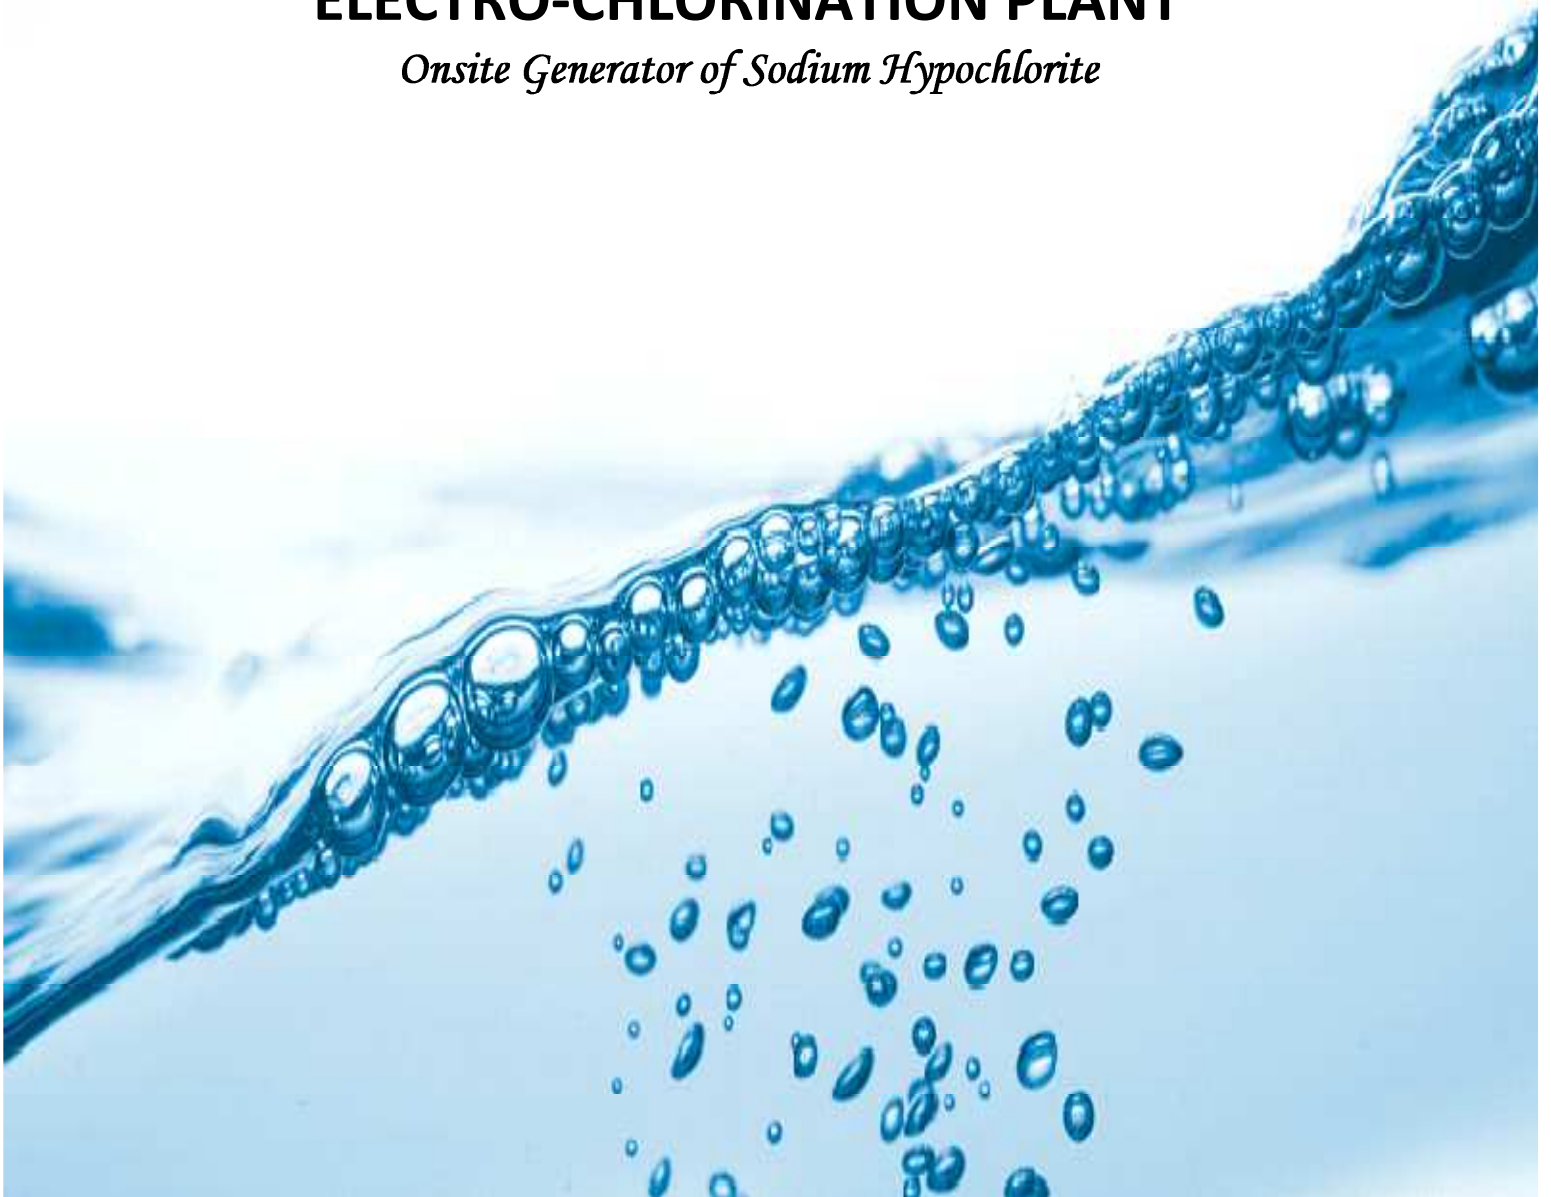



ENCEE CHLOR ®

ENCEE CHLOR

Is a unique onsite Sodium Hypo Chlorite Generator. An ideal, convenient and economical solution to water disinfection system using chlorination. The generation of Chlorine is instantaneous and provides maximum safety to operating personnel as the generation can be terminated by switching off the power supply to unit.

WHAT IS ONSITE ELECTRO-CHLORINATION?

It is a simple and proven technology to convert ordinary salt (or sea water) by means of electrolysis into 1st grade Sodium Hypo Chlorite (ELECTRO HYPO). It is always applied onsite, at the point of application. No chemicals other than ordinary salt are used throughout the process. A dilute brine solution (or sea water) is fed to an electrolyser cell. When a low voltage DC current is applied, electrolysis occurs and Sodium Hypo Chlorite (NaOCl) is generated instantaneously.

CHEMISTRY

The actual reactions are complex, but the key reaction can be represented by the following equation.



ELECTRO HYPO

Thus generated contains 0.7% to 1% chlorine. Below 1% hypo is classified as a non hazardous chemical although still a very effective disinfectant. The only by product Hydrogen is safely vented into the atmosphere. It is preferred water disinfection / antifouling option... compared to Gaseous Chlorine, Commercial Hypo and Bleaching Powder... considering Safety, Economy, Convenience and Environmental Protection.

It is the ultimate and the most versatile Chlorine based water disinfection option for:

- Cooling Tower Chlorination
- Small and Large Water Treatment Plants
- Rural and Urban water supply schemes
- Effluent & Sewage Treatment Plant

The potential risks associated with the bulk transport, bulk storage and handling of hazardous Chemicals (Gaseous Chlorine, Commercial Hypo and Bleaching Powder) is totally eliminated with onsite chlorination. It is the preferred substitute and the future of Water Chlorination.

SALIENT FEATURES

- Produces Sodium Hypochlorite solution onsite.
- Only common salt, water and power are the raw materials.
- Compact and Easy to operate and maintain.
- Generation is as and when required hence problem of deterioration of chlorine strength while storing is avoided.
- Eliminating the hazards of gas chlorine and decay of purchased hypochlorite makes ELECTRO-CHLORINATOR CONVENIENT.
- Chemical transportation, storage and inventory avoided.
- Low operating cost when compared to bleaching powder, commercial sodium hypochlorite, chloramines and other chemical disinfectants
- Require very low level of skill for operation.

APPLICATION OF ELECTRO-CHLORINATOR

- **Cooling water treatment and algae control**
- **Potable water treatment for drinking purpose**
- **Effluent control including treatment of sewage**
- Decomposition of Cyanide waste in Electroplating and bulk drug plants
- Open well water treatment
- Hospital disinfection, hygiene maintenance and waste management
- Sterilizer for food processing in Hotel and Restaurants
- Meat and poultry processing facilities disinfection
- Public Places disinfection
- Public health water treatment to control micro-organisms, destroy hydrogen-sulphide (odor), control algae growth and keeps transmission pipes clean
- Laundry and bleaching
- Poultry water disinfection
- Dairy equipment sterilization
- Manufacture of oxidized starch
- Bleaching of textiles, paper shellac, carpets, alginates

OPERATING COST COMPARISON

Disinfection system	Equivalent	Cost / Kg, lit	Cost - Rs.
Chlorine Gas (Baby Cylinders)	1 Kg	40	40
Bleaching Powder (20% chlorine content average)	5 Kg	15	75
Purchased hypochlorite (50 gpl concentration)	20 lit	15	300
ENCEE CHLOR Hypochlorite (10 gpl concentration)	100 lit	0.20 (salt + power cost)	20

COMPARATIVE ADVANTAGES OF ELECTRO-CHLORINATOR

Disinfection system	Source of Raw Material	Handling of Product	Shelf-Life of Product	Operation & Maintenance	Cost of Consumable
ENCEE CHLOR	Only Edible Salt	No transportation and storage, easy handing. No loss of chlorine.	Produced and dosed onsite, No storage required.	Very Easy	Very Economical
Chlorine Gas	Dependent on supplier and uneconomical for transport	Transportation and handling is hazardous	Stable	Difficult	Most Economical
Bleaching Powder	Dependent on Supplier	Handling and storage is inconvenient and Messy	Highly unstable and Rapidly loses Chlorine on Storage	Inconvenient, Difficult, Messy	Expensive
Commercial Sodium Hypochlorite	Dependent on supplier and Uneconomical for Transportation	Handling and Storage is inconvenient	Unstable and loses chlorine on Storage	Fairly Easy	Most Expensive

ENCEE CHLOR MODELS

BATCH TYPE	CAPACITY (CHLORINE OUTPUT)
NC-50	500 gms/batch of 8 hrs
NC-100	1 Kg/batch of 8 hrs
NC-400	4 Kg/batch/day
NC-600	6 Kg/batch/day
NC-800	8 Kg/batch/day
NC-1200	12 Kg/batch/day

CONTINUOUS TYPE	CAPACITY (CHLORINE OUTPUT)
NC-25c	25 gms / hr
NC-50c	50 gms / hr
NC-100c	100 gms / hr
NC-250c	250 gms / hr
NC-12K	500 gms / hr
NC-24K	1000 gms / hr
NC-48K	2000 gms / hr
NC-72K	3000 gms / hr



Note: 1 Kg of active Chlorine can treat 500,000 ltr (500 m³) of water at dose of 2 ppm

Customized Models can be made as per requirement



Rite Water Solutions (I) Pvt. Ltd.
 K - 60, M.I.D.C. Hingna Road, Nagpur - 440016.
 Tele Fax: +91 7104 234739
 Website : www.ritewater.in